

COOLING TOWER

TP SERIES

FIBERGLASS

- **All Non-Ferrous Design**
- **45 to 540 Tons Capacity**
- **UV Stabilized Fiberglass Shell**
- **TEFC Fan Motor with ABS Fan Blades**
- **10 Year Shell Warranty**
- **5 Year Mechanical Warranty**

The **TP Series** cooling tower is ready to meet the needs of today's industry. This tower cell is made of all non-ferrous materials, including fiberglass shell, TEFC motor, ABS fan, PVC wet deck and distribution header. The fiberglass shell is 1/2" thick and even thicker in certain support areas. Other product features include:

TOWER DESIGN:

- Single or multi cell designs
- Total non-ferrous construction materials
- Single inlet and drain connections on models up to 270 tons
- Induced draft air movement
- Structural galvanized steel base on 45 to 135 ton models
- Structural painted steel base on 170 to 540 ton models

SHELL CONSTRUCTION:

- High strength fiberglass molding
- 1/2" of structural thickness in reinforced areas
- UV stabilized coating
- Acrylic adhesive bonding between shell halves
- Polyurethane sealant

FAN:

- Air foil shaped blades for increased air flow
- Blades are made of a glass fiber reinforced polymer
- Direct drive
- Factory set for maximum air movement

MOTOR:

- TEFC construction
- Mounted on a stainless steel frame
- Supported on reinforced fiberglass shell area
- Mounted to shell with stainless steel fasteners

INLET LOUVERS:

- PVC construction
- Easily removed for cleaning
- Vertical orientation to eliminate 'splash out'
- Directs air flow at proper angle for even distribution into wet deck
- Helps prevent air-borne debris from entering cell



TP-135 shown

DISTRIBUTION HEADER:

- Non-ferrous PVC 'cross' construction
- Stationary
- Computer designed spray pattern
- Large orifice spray heads
- PVC spray heads
- Drift eliminator prevents over spray and water loss

WET DECK:

- Stacked honeycomb pattern maximizes water and air flow for greater cooling efficiency
- PVC construction

INSPECTION COVERS:

- Easily removed
- Seamless gasket sealing
- Allows for inspection of cell interior and replacement of wet deck

WARRANTIES:

- 10 year shell warranty
- 5 year motor/fan warranty

PRICE & PERFORMANCE... for the LONG TERM

525 East Stop 18 Road Greenwood, IN 46142 317-887-6352 fax: 317-881-1277 web site: www.Temptek.com email: sales@Temptek.com

www.aoksupplies.com

TEMPTTEK

since 1989

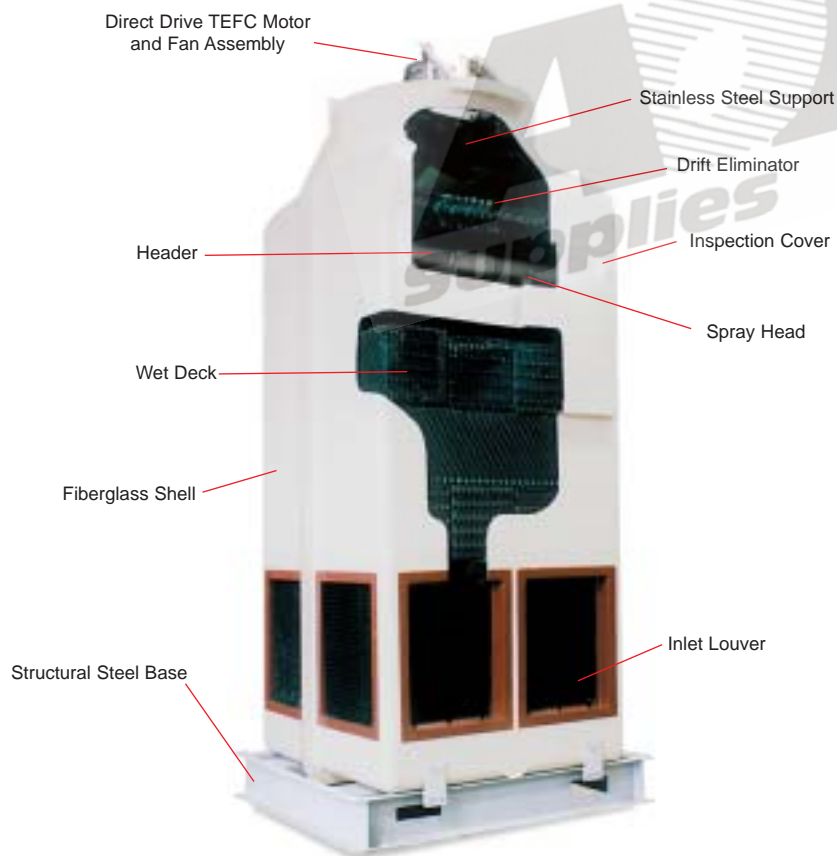
SPECIFICATIONS

TP SERIES SPECIFICATIONS

MODEL		T45P	T85P	T05P	T135P	T170P	T210P	T270P	T405P	T540P
CAPACITY	Capacity (tons) ¹	45	85	105	135	170	210	270	405	540
	Flow rate (gpm)	135	255	315	405	510	630	810	1,215	1,620
FAN	Quantity	1	1	1	1	2	2	2	3	4
	RPM	1,170	1,170	1,170	870	1,170	1,170	870	870	870
	# of blades per fan	9	9	9	6	9	9	6	6	6
	Diameter of fan (inches)	36	42	42	60	42	42	60	60	60
	Total CFM	12,040	21,700	25,000	30,500	43,400	50,000	61,000	91,500	122,000
MOTOR	Quantity	1	1	1	1	2	2	2	3	4
	Total nameplate HP	3	5	10	7.5	10	20	15	22.5	30
AMPERAGE ²	230 / 3 / 60	9.6	15.2	28.0	22.0	28.0	56.0	44.0	66.0	88.0
	460 / 3 / 60	4.8	7.6	14.0	11.0	14.0	28.0	22.0	33.0	44.0
	575 / 3 / 60	3.9	6.1	11.0	9.0	11.0	12.0	18.0	27.0	36.0
PIPE SIZES (inches)	To process	3	4	4	4	6	6	6	2@ 6	2@ 6
	From process	4	6	6	6	10	10	10	2@ 10	2@ 10
DIMENSIONS (inches)	Height	138	138	138	140	138	138	140	140	140
	Length	60	84	84	96	145	145	169	254	338
	Depth	49	73	73	85	84	84	96	96	96
WEIGHT (LBS)	Dry	725	1,290	1,390	1,612	2,310	2,210	3,125	4,350	5,800
	Wet	1,470	3,100	3,200	4,200	5,700	5,600	7,800	11,000	15,000
	Shipping ³	1,100	1,580	1,680	1,950	2,310	2,710	3,125	4,350	5,800

Notes:

1. Tons capacity at 15,000 BTU / hr. 2. Full load amps shown. No allowance for inrush. Service disconnect by owner. Full load amps are higher than run load amps and must be used for sizing disconnects and supply wiring. Consult factory for 50hz operation.
3. Unit weight crated for shipment.


THESE OPTIONS ARE AVAILABLE:
FAN STARTER KIT:

- Motor starter contactor
- Motor overload relay
- Nema 1 enclosure
- Fan thermostat

SIDE OUTLET:

- PVC flange
- Factory installed

BASIN FLOAT VALVE:

- Mechanical float and valve
- 1/2" supply connection
- Factory or field installed

TOWER STAND:

- 10' corner post design with cross bracing
- Ladder and railing attachments

PRICE & PERFORMANCE... for the LONG TERM

525 East Stop 18 Road Greenwood, IN 46142 317-887-6352 fax: 317-881-1277 web site: www.TempTek.com email: sales@TempTek.com

Since product innovation and improvement is our constant goal, all features and specifications are subject to change without notice. form #ADV-535 3/03 ©2003 TEMPTTEK, INC.

www.aoksupplies.com

TEMPTEK

since 1989